

Appendix 1 - Harvey Hadden Track Improvement Project

Project Brief :- Following the Track improvements that took place in 2015 there has been a number of design problems that have been identified and need to be rectified in order to allow the stadium to function better and to ensure that the Stadium / Track complies with UK Athletics facility standards.

The works will include:-


- The Pole Vault take off box,
- Install 2 new 7m jump bars into the long jump runway
- Resurface the entire High Jump Fan.
- Project management
- Site Surveys and UK Athletics Accreditation.
- CDM regulations

These works are essential to ensure that the track remains compliant with UK Athletics competition compliance rules.

Harvey Hadden Improvement Works

DRG. NO. 100

Copyright Sports Labs Ltd 2018

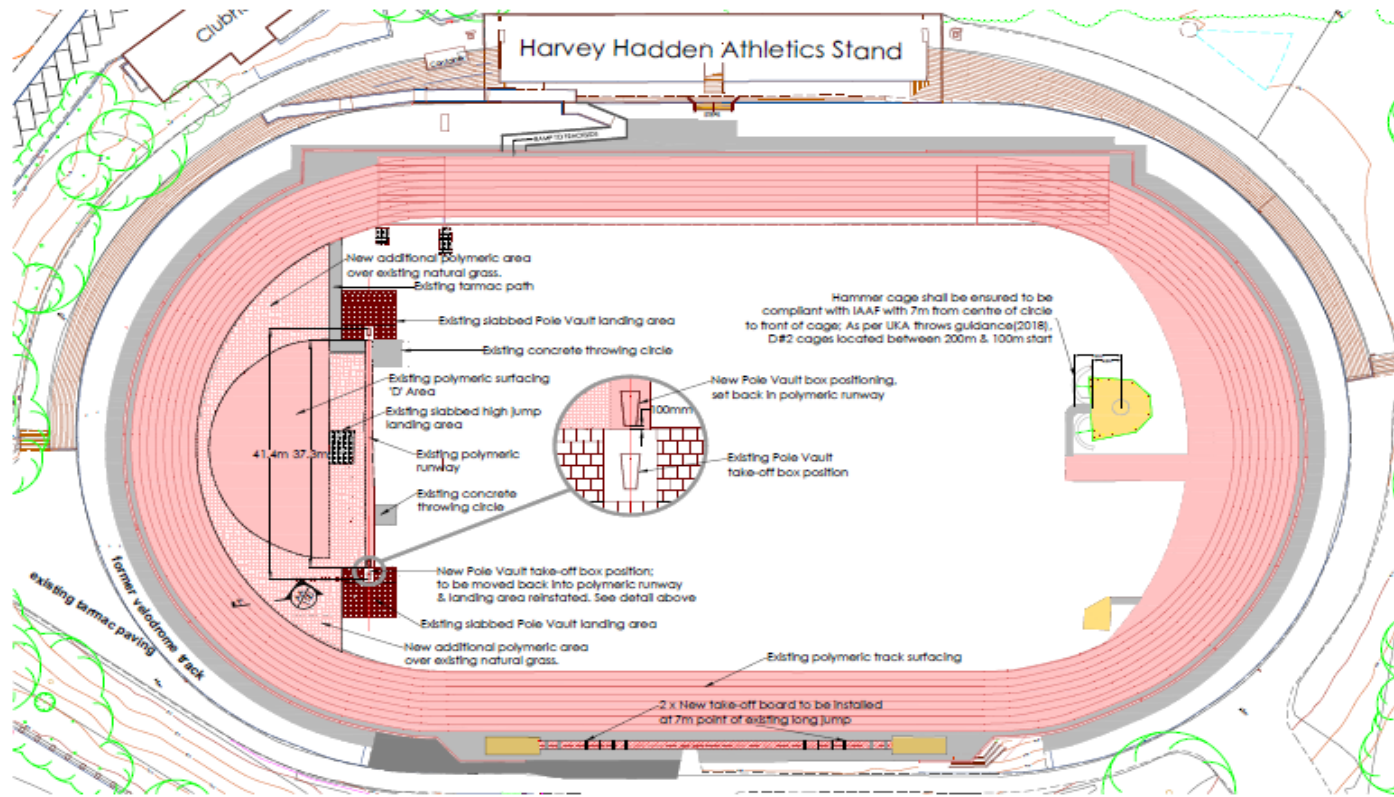


NOTES
It is the contractor responsibility to check design levels and sizes for compliance. Any discrepancies or errors to be identified to the design team.
Topographical survey recommended to confirm the dimensional area and ground levels to determine earthworks plan.

The contractor shall make relevant allowances for removal of the existing drop kerb within the high jump 'D' area.

Works to include
- 2 x New Long Jump take-off boards at 7m distance
- New additional polymeric 'D' Area to existing natural grass
- New Pole Vault take-off box position and associated reinstatement

01 GENERAL ARRANGEMENT
SCALE 1:750

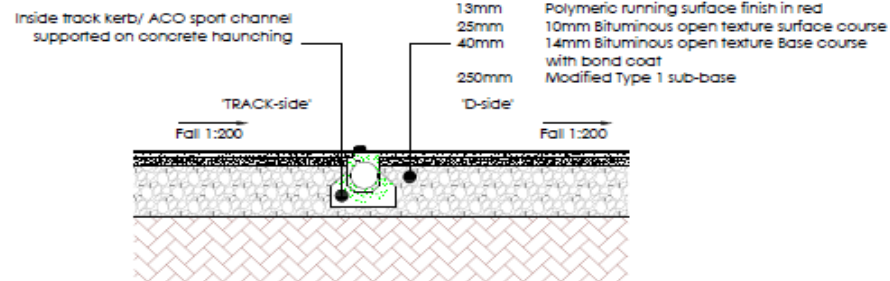

AA TYPICAL NEW POLYMERIC 'D' AREA
SCALE 1:20

DATE: 14/05/18 BY: SLS/CSK/SLD

sportslabconsult

info@sportslabconsult.com

HARVEY HADDEN ATHLETICS TRACK
GENERAL ARRANGEMENT

1:750

DATE: 14/05/18 2827 DRAWN BY: SLS/CSK/SLD

Appendix 2 - Financial Details

Construction Costs		
Company	Amount £	Details
CLS Track Construction	96,410.61	Excludes VAT Construction Work Pole vault High Jump Long Jump
Sportslab	7425.00	Excludes VAT
UKA accreditation	2,000.00	Provisional sum
CDM	2,500.00	Estimate at present
Total Project Costs	108,335.61	

Funding	£ Amount
Notts Athletic Club	68335.61
Nottingham City Council Park Lives	30,000
MHCLG Park Improvement Fund	10,000
Total Funding	108,335.61